
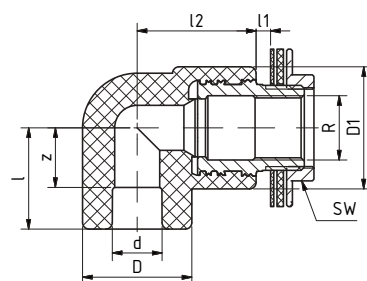


GOMITO FILETTATO M

con controdado e guarnizione


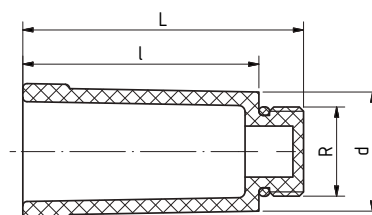
Sistema: aquatherm green pipe, aquatherm blue pipe**Materiale:** Fusiolen® PP-R, ottone**Standard:** DIN 16962, DIN EN ISO 15874**Colore:** verde

SDR	Art.-Nr.	d [mm]	R	l [mm]	z [mm]	D [mm]	l1 [mm]	l2 [mm]	D1 [mm]	SW [mm]	Peso [kg]	Sistema	Conf.	GP	Prezzo €/pz
<i>saldatura a tasca</i>															
6	0020206	16	1/2"	37,0	24,0	29,5	3,5	35,0	44,0	29	0,201	•	10	A	14,75
7,4	0020208	20	1/2"	37,0	22,5	29,5	3,5	35,0	44,0	29	0,154	• •	10	A	14,75
11	0020209	25	1/2"	37,0	21,0	34,0	3,5	37,0	44,0	29	0,206	• •	10	A	14,75

Ad esempio per collegamento di un serbatoio o applicazione con piastra di montaggio (Art.-Nr. 0060110-0060115)

TAPPO PER PROVA IMPIANTO


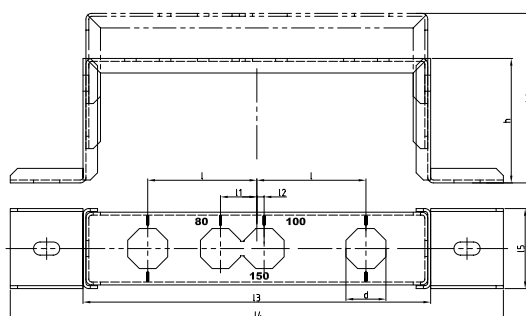
con guarnizione

Sistema: aquatherm green pipe, aquatherm blue pipe**Materiale:** Fusiolen® PP-R**Colore:** verde

Art.-Nr.	d [mm]	R	l [mm]	L [mm]	Peso [kg]	Sistema	Conf.	GP	Prezzo €/pz
0050708	28	1/2"	55,5	66,0	0,022	• •	10	A	0,90
0050710	34	3/4"	55,5	66,0	0,027	• •	10	A	1,10

TELAIO DI MONTAGGIO

doppio

Sistema: aquatherm green pipe, aquatherm blue pipe**Materiale:** ferro zincato**Colore:** zinco

Art.-Nr.	b [mm]	l [mm]	l1 [mm]	l2 [mm]	h [mm]	h1 [mm]	l3 [mm]	l4 [mm]	l5 [mm]	Peso [kg]	Sistema	Conf.	GP	Prezzo €/pz
0060110	27,5	75	25	5	92,5	122,5	239	339	55	0,630	• •	1	A	30,23