



KUZUGAS DN 12 C€ 0051-CPR-0399 EN 14800:2007 GAS MANIFATTURATO-NATURALE-GPL

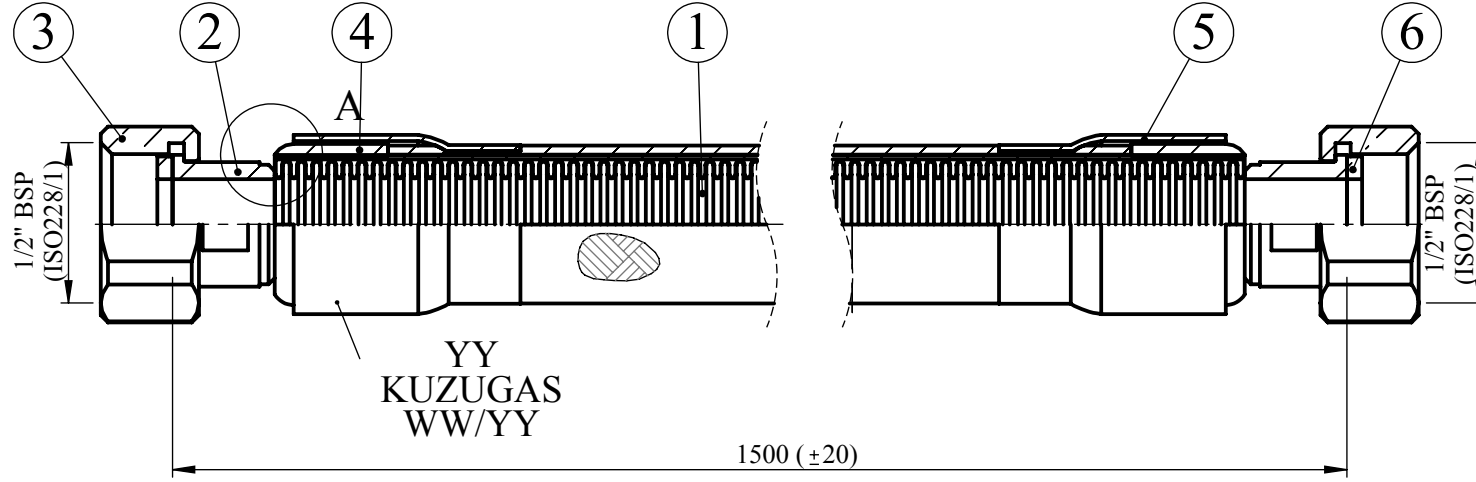

NOT: TRANSPARAN SARI PVC

NOT: ÜRÜN ELDE 2YE KATLANARAK PAKETLENECEKTİR.

8	LABEL	0000 0611 36	1	
7	TRANSPARENT NYLON	0000 0600 14	1	
6	1/2" GASKET	0000 0004 44	2	NBR
5	RING 2	0000 0005 92	2	AISI304/1.4301
4	DN12 RING	0000 0005 33	2	AISI304/1.4301
3	1/2" BSP NUT (NICKEL PLATED)	0000 0009 53	2	CW617N/2.0402
2	DN12 LINER	0000 0004 03	2	AISI303/1.4305
1	KZ325 DN12 B + TRANSPARENT YELLOW PVC L=1458mm (It is coated with PVC hose)	0000 0041 89	1	HOSE (AISI316L) PVC
MONTAJ NO PART NR	PARÇA ADI / ITEM NAME	RESİM NO/ DRAWING NO	ADET QTY	MALZEME MATERIAL



DETAY A
ÖLÇEK 2 : 1

1	Etiket değiştirilmiştir. DBF0259		24.05.2016	SEDA ÇAKIR	BAHRİ BİÇİMSEVEN													
0	İlk yayın		06.08.2015	SEDA ÇAKIR	BAHRİ BİÇİMSEVEN													
Rev.	Description		Date	Drawer	Visa													
General Tolerances EN 22768 f	Angles related to shortest side (mm)					Chamfer & Radius (mm)					Linear Dimensions (mm)					A4	KUZUFLEX® Flexible Metal Hoses	
	From	To	<10	10 50	50 120	120 400	>400	0,5 3	3 6	>6	<6	6 30	30 120	120 400	400 1000			>1000
Surface Roughness EN ISO 1302	Tol.		±1°	±30'	±20'	±10'	±5'	±0.2	±0.5	±1	±0.05	±0.1	±0.15	±0.2	±0.3	±0.5	Scale 1/1	Sheet 1/1
ADDITIONAL OPERATION	Heat Treatment		Net Weight		Material		Customer Articiel No		Item Name		Drawing No		Rev.					
			---				---		KZ325 DN12 B ASSEMBLY L=1500mm		0736 0005 00		1					

Certification Level	
Inspection Class	

This drawing and all the information contained can not be used or reproduced, integrity or partially, without written authorization of KUZUFLEX Flexible Metal Hoses